



Micro-Lok® Fiber Glass Pipe Insulation


Description

Micro-Lok fiber glass pipe insulation is made from glass fibers bonded with a thermosetting resin, produced in 36" (0.92 m), 47.2" (1.2 m) and 48" (1.22 m) lengths. Jacketed with a reinforced vapor retarder facing and a factory-applied, longitudinal acrylic adhesive closure system, Micro-Lok is designed for application temperatures from 0°F to 850°F (-18°C to 454°C). Section joints are sealed with butt strips which are supplied from the factory. **Micro-Lok AP-T Plus** may be painted with a latex paint after installation.

The factory-installed tape system permits installation at ambient temperatures down to 15°F (-9°C), and will not soften or separate when exposed to high ambient temperatures and humidity.

Uses

Micro-Lok fiber glass pipe insulation is suitable for installation over hot, cold, concealed and exposed piping systems with operating temperatures up to 850°F (454°C). Weather-protective jacketing is required for outdoor applications. Pipes operating below ambient temperatures require all joints to be sealed with the factory-applied, self-seal lap and butt strips.

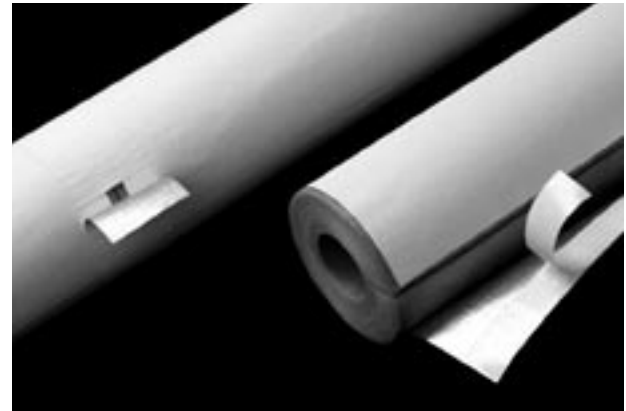

Operating Temperature Limits: 0°F to 850°F (-18°C to 454°C)


Specification Compliance

ASTM C 1136 (Jacketing) (Replaces HH-B-100B, Type I & II)
ASTM C 547 Type I (Replaces HH-I-558B, Form D, Type III, Class 12, Class 13 up to 850°F [454°C])
MIL-I-22344C
New York City MEA # 330-85-M
NFPA 90A & 90B, FHC 25/50

Physical Properties

Service Temp. Range	0°F to 850°F (-18°C to 454°C)
Moisture Sorption	<0.2% by volume
Alkalinity	<0.6% expressed as Na ₂ O
Corrosivity	Does not accelerate
Capillarity	Negligible (after 24 hours)
Shrinkage	None
Fungi & Bacteria Resistance	Does not breed or promote
Surface Burning Characteristics	Composite FHC 25/50 per ASTM E 84, UL 723, NFPA 255, CAN/ULC S102-M88
Limited Combustibility	NFPA 259
Jacketing	ASTM C 1136 (Type I)
Water Vapor Permeance (ASTM E 96 - Procedure A)	.02 perms max.
Beach Puncture (ASTM D 781)	50 oz. in./in. (58 SI) tear min.
Tensile Strength (ASTM D 828)	45 lbs./in. (7.9N/mm) width min. (MD) 30 lbs./in. (5.23N/mm) width min. (CD)

Thermal Conductivity ("k")

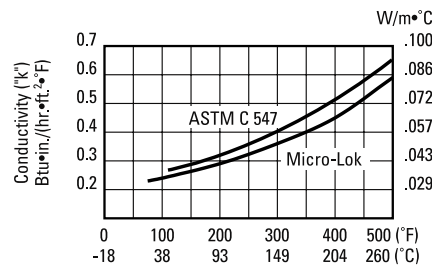

Mean Temperature	°F	75	100	200	300	400	500
Mean Temperature	°C	24	38	93	149	204	260
Btu·in./hr·ft²·°F		.23	.24	.29	.36	.45	.59
W/m·°C		.033	.035	.042	.052	.065	.085

ASTM Test Methods & Guidelines

- C 356Linear Shrinkage
- C 411Hot Surface Performance
- C 547Pipe Insulation
- C 585Simplified Dimensional Standards for Nesting [Except 3/8" (20 mm) IPS, 1" (25 mm) IPS, and 1 5/8" (41mm) CT]
- C 1136Vapor Barrier Jacketing (Type I)

Micro-Lok®

Fiber Glass Pipe Insulation

Size Availability

Insulation Thickness		Iron Pipe Size Range		Copper Tubing Size Range	
in.	mm	in.	mm	in.	mm
1/2	13	1/2 - 8	13 - 203	5/8 - 3 1/8	16 - 80
1	25	1/2 - 8	13 - 203	5/8 - 3 1/8	16 - 80
1 1/2	38	1/2 - 8	13 - 203	5/8 - 3 1/8	16 - 80
2	51	1/2 - 8	13 - 203	5/8 - 3 1/8	16 - 80
2 1/2*	64	1/2 - 8	13 - 203	5/8 - 3 1/8	16 - 80
3*	76	1/2 - 8	13 - 203	5/8 - 3 1/8	16 - 80

* Contact the nearest Regional Sales Office for availability.

Qualifications for use


A sufficient thickness of insulation must be used to keep the maximum surface temperature of Micro-Lok AP-T Plus below 150°F (66°C). In addition, at operating temperatures above 500°F (260°C), Micro-Lok pipe insulation must be applied in a thickness ranging from 2" (51 mm) minimum to 6" (152 mm) maximum.

During initial heat-up to operating temperatures above 350°F (177°C), an acrid odor and some smoke may be given off as the organic binders used in the fiber glass pipe insulation begin to decompose. When this occurs, caution should be exercised to ventilate the area well. This loss of binder does not directly affect the thermal performance of the pipe insulation, but the compressive strength and resiliency of the product are reduced. For applications with excessive physical abuse or vibration at high temperatures, consult your local Performance Materials Division territory manager for alternate material recommendations.

Application Recommendations.

AP-T Plus Jacket and Butt Strips.

1. Do not apply Micro-Lok insulation with AP-T Plus jacketing if air temperature is below 15°F (-9°C) or above 130°F (54°C) due to the effect of temperature on tape performance. We recommend stapling when application falls outside this temperature range.
2. If stored below 15°F (-9°C) or above 130°F (54°C), insulation cartons should stand within the recommended temperature range for 24 hours prior to application.
3. Once release paper is removed, both adhesive and lap must be kept free of dirt and water, and the lap sealed immediately.
4. When adhered, the lap and butt strips must be pressurized by rubbing firmly with a plastic squeegee or the back of a knife blade to assure positive closure.

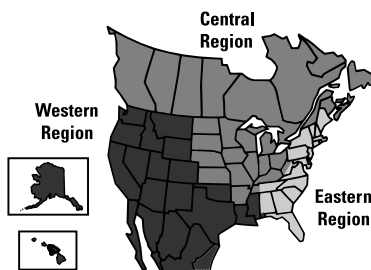

North American Sales Offices, Performance Materials Division

Eastern Region

P.O. Box 158
Defiance, OH 43512
(800) 334-2399
Fax: (419) 784-7866

Central and Western Region

P.O. Box 5108
Denver, CO 80217
(800) 368-4431
Fax: (303) 978-4661

Outside North America

(303) 978-4655
Fax: (303) 978-2627



Performance Materials Division

P.O. Box 5108
Denver, CO 80217-5108
www.jm.com

The physical and chemical properties of Micro-Lok® fiber glass pipe insulation represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Numerical flame spread and smoke developed ratings are not intended to reflect hazards presented by this or any other materials under actual fire conditions. Check with the Regional Sales Office nearest you to assure current information. **All Johns Manville products are sold subject to Johns Manville's Limited Warranty and Limitation of Remedy. For a copy of the Johns Manville Limited Warranty and Limitation of Remedy, call the 800 number below.** For information on other Johns Manville thermal insulations and systems and a copy of the Spec-Line® CSI formatted specification, call **1-800-654-3103**. To access automated fax-on-demand service in the United States and Canada, simply call **1-888-INSULFX** (1-888-467-8539) from a fax or phone.